


The art of handling air

Type QSH



The art of handling air

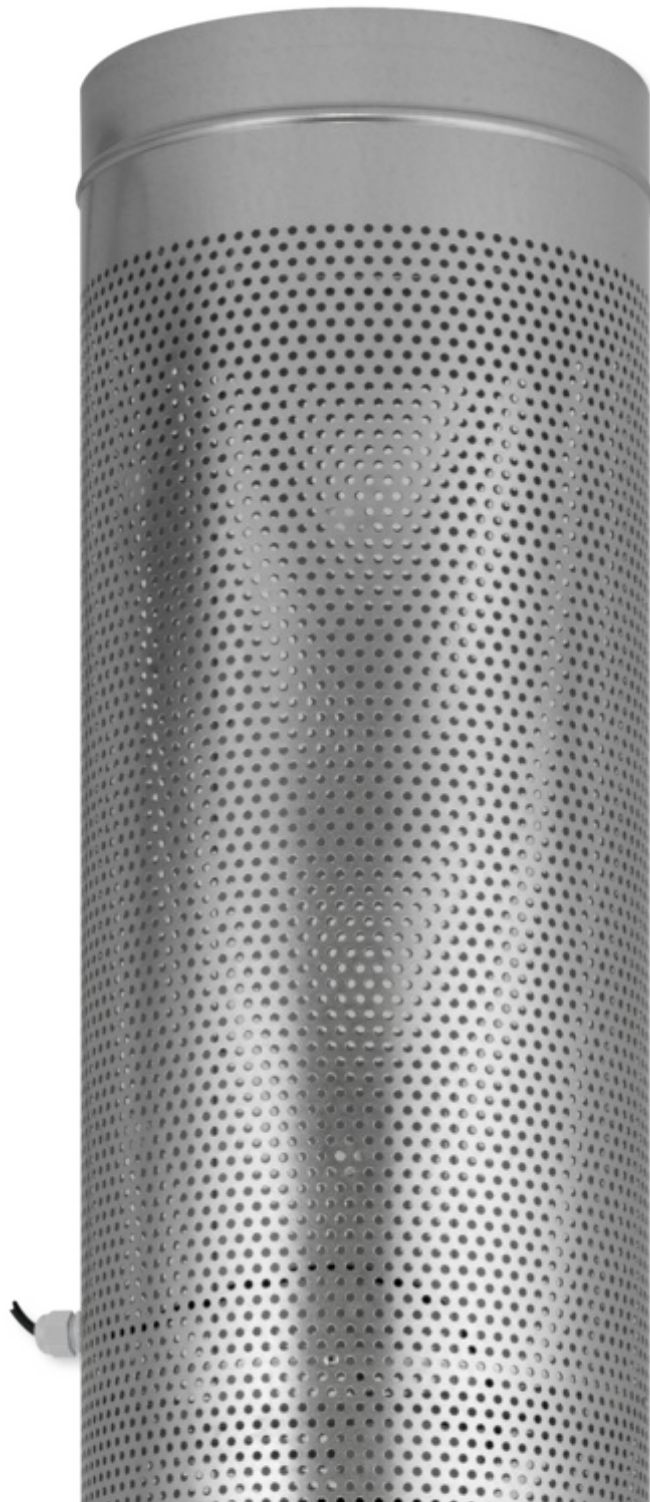

FOR INDUSTRIAL ZONES WITH AIR POLLUTING PROCESSES

Displacement flow diffusers with bell-shaped, low turbulence air discharge in cooling mode

- Nominal sizes 250, 355, 450, 560 mm
- Volume flow rate range 205 – 1570 l/s or 738 – 5652 m³/h
- Casing made of galvanized sheet steel
- For variable and constant volume flows
- Installation either free hanging or on walls or pillars
- Low-turbulence displacement ventilation
- Discharge direction can be adjusted manually or with an actuator
- Chain pull for adjusting the discharge direction manually

Optional equipment and accessories

- Exposed diffuser parts in RAL CLASSIC colours
- Electric and thermal actuators for adjusting the air discharge direction
- Bowden cable for adjusting the discharge direction manually
- Wall mount
-

The art of handling air

TROX España



Ctra. Castellón, Km. 7
Pol. Ind. La Cartuja
E-50720 Zaragoza
Tel: +34 976 50 02 50
Fax + 34 976 50 09 04
Email:trox@trox.es

Servicios on-line:

- > [TROX Academy](#)

- > [Contactos](#)

- > [Formulario de contacto](#)

- > [Mapa de situación](#)

- > [Condiciones de venta y garantía](#)

- > [TROX Plazos de entrega](#)

- > [Certificado AENOR](#)

- > [Certificado IQNet](#)

- > [Certificado TÜV](#)

Líneas telefónicas de atención:

Delegaciones comerciales
[Contacto](#)

Customer Service
+34 976 50 02 50

[Contacto](#)

Horario de atención al cliente Lunes a
Jueves de 9 a 14 h y de 15h30 a 17h30,
Viernes de 9 a 14 h

TROX EN REDES SOCIALES
